



ARTICLE LIST 2026

Gültig ab 01.09.2026



DIRECTLY CONNECTED

The new press fitting for a direct and secure connection / transition from **multitubo multilayer composite pipe** to **copper and stainless steel pipe**.



Transition to multilayer composite pipe

- Multitubo G2 design
- Dimensions 16–32 mm
- Can be pressed with with U/UP, H, TH and Rfz profile

Transition to copper and stainless steel pipe

- Dimensions 15–28 mm
- Universally compressible with M and V profiles

FERROGUARD

Compact magnetite separator

We are revolutionizing
the installation and operation
of magnetite separators!

*The trick
with the grip!*



The problem solver for installer customers service:

Easy installation

Remove the old pump (DN 25 /180 mm) and install the new pump (DN 25 / 130 mm) with our FERROGUARD. Compatible with all standard 130 mm pumps.

No pipe work

No cutting required –
saves 2–3 hours of installation time.

Compact and extremely versatile

Can be used before and after the pump and can be rotated by 360°.

Dry cleaning during operation

Turn the service handle with its patented system ball, wipe away magnetite – no flushing, no refilling needed.

Strongest magnetic power


on the market in the 50 mm compact separator range.

High efficiency

Full power with minimal impact on the circulation volume thanks to innovative Omega water flow.

Immediate protection

Immediately protects pumps, valves and components from magnetite.





CONTENT

S. 05 - 08 **Pipes**

S. 08 - 19 **Pressfittings**

S. 19 - 22 **Modular**

S. 22 - 27 **Accessories**

S. 27 - 33 **Tools**

S. 33 **Starterpacks**

S. 34 **AGB**

S. 35 **Ansprechpartner**

PIPES



Multi-layer Pipe PE-RT/AL/PE-RT, white, coils

MULTITUBO systems multi-layer pipe, according to ISO 21003, absolutely diffusion tight. Application: Installation of tap water- and heating-systems.

ArticleNo	Type	Coil	Palett
10011	16 x 2,00	100 m	2600 m
10010	16 x 2,00	200 m	2600 m
10015	16 x 2,00	500 m	4000 m
1001920	16 x 2,00	20 m	1000 m
10030	20 x 2,25	100 m	1300 m
1003920	20 x 2,25	20 m	500 m
10040	25 x 2,50	50 m	650 m
10050	32 x 3,00	25 m	375 m
10051	32 x 3,00	50 m	500 m
10060	40 x 4,00	50 m	350 m



Multi-layer Pipe PE-RT/AL/PE-RT, white, 3m-lengths

MULTITUBO systems multi-layer pipe, absolutely diffusion tight. Application: Installation of tap water- and heating-systems. Supplied in straight lengths of 3 m.

ArticleNo	Type	Tube	Rack
15013	16 x 2,00	75 m	2475 m
15031	20 x 2,25	51 m	1683 m
15041	25 x 2,50	30 m	990 m
15051	32 x 3,00	21 m	693 m
15061	40 x 4,00	12 m	396 m
15071	50 x 4,50	6 m	198 m
15081	63 x 6,00	9 m	162 m
15091	75 x 7,50	3 m	99 m



Multi-layer Pipe PE-RT/AL/PE-RT, white, 5m-lengths

MULTITUBO systems multi-layer pipe, absolutely diffusion tight. Application: Installation of tap water- and heating-systems. Supplied in straight lengths of 5 m.

ArticleNo	Type	Tube	Rack
15012	16 x 2,00	125 m	4125 m
15030	20 x 2,25	85 m	2805 m
15040	25 x 2,50	50 m	1650 m
15050	32 x 3,00	35 m	1155 m
15060	40 x 4,00	20 m	660 m
15070	50 x 4,50	10 m	330 m
15080	63 x 6,00	15 m	270 m
15090	75 x 7,50	5 m	165 m
15100	90 x 8,50	5 m	165 m
15110	110 x 10,00	5 m	90 m



Multilayer-Nipple

MULTITUBO systems nipple made of PE-RT / Al / PE-RT, calibrated on both sides for the shortest connection of two fittings.

ArticleNo	Type	Carton	Carton
17010	16x2.00mm - 71mm	10 pcs	200 pcs
17030	20x2.25mm - 71mm	10 pcs	160 pcs
17040	25x2.50mm - 83mm	10 pcs	100 pcs

PIPES



Multi-layer Pipe PE-RT/AL/PE-RT, red, coils

MULTITUBO systems multi-layer pipe, absolutely diffusion tight. Application: Installation of panel heating (tmax : 60 °C, pmax : 6 bar). Now extra thin aluminium layer, for more flexibility and easier handling.

ArticleNo	Type	Coil	Palett
12000	14 x 2,00	200 m	2600 m
12005	14 x 2,00	500 m	3000 m
12010	16 x 2,00	200 m	2600 m
12012	16 x 2,00	240 m	3120 m
12015	16 x 2,00	500 m	4000 m



Multi-layer Pipe, white, in protective tube, black

MULTITUBO systems multi-layer pipe, in corrugated protective tube made of PE-HD.

ArticleNo	Type	Coil	Palett
16110	16 x 2,00	75 m	975 m
16130	20 x 2,25	75 m	675 m
16140	25 x 2,25, black	50 m	450 m



Multi-layer Pipe, white, in protective tube, red

MULTITUBO systems multi-layer pipe, in corrugated protective tube made of PE-HD.

ArticleNo	Type	Coil	Palett
16110R	16 x 2,00	75 m	975 m
16130R	20 x 2,25	75 m	675 m
16140R	25 x 2,50	50 m	450 m



Multi-layer Pipe, white, in protective tube, blue

MULTITUBO systems multi-layer pipe, in corrugated protective tube made of PE-HD.

ArticleNo	Type	Coil	Palett
16110B	16 x 2,00	75 m	975 m
16130B	20 x 2,25	75 m	675 m
16140B	25 x 2,50	50 m	450 m



Multi-layer Pipe Plus S4, white, insulation blue, coils

MULTITUBO systems multi-layer pipe, with round insulation, thickness of insulation 4 mm, heat conductance rate (WLG) 040.

ArticleNo	Type	Coil	Palett
14110	16 x 2,00	100 m	800 m
14111	16 x 2,00	50 m	750 m
14130	20 x 2,25	100 m	800 m
14131	20 x 2,25	50 m	750 m

PIPES

Multi-layer Pipe Plus S4, white, insulation red, coils

MULTITUBO systems multi-layer pipe, with round insulation, thickness of insulation 4 mm, heat conductance rate (WLG) 040.



ArticleNo	Type	Coil	Palett
14110R	16 x 2,00	100 m	800 m
14111R	16 x 2,00	50 m	750 m
14130R	20 x 2,25	100 m	800 m
14131R	20 x 2,25	50 m	750 m

Multi-layer Pipe Plus S9, white, insulation blue, coils

MULTITUBO systems multi-layer pipe, with round insulation, thickness of insulation 9 mm, heat conductance rate (WLG) 040.



ArticleNo	Type	Coil	Palett
14310	16 x 2,00	50 m	500 m
14330	20 x 2,25	50 m	400 m
14340	25 x 2,50	50 m	400 m
14350	32 x 3,00	50 m	250 m

Multi-layer Pipe Plus S9, white, insulation red, coils

MULTITUBO systems multi-layer pipe, with round insulation, thickness of insulation 9 mm, heat conductance rate (WLG) 040.



ArticleNo	Type	Coil	Palett
14310R	16 x 2,00	50 m	500 m
14330R	20 x 2,25	50 m	400 m
14340R	25 x 2,50	50 m	400 m
14350R	32 x 3,00	50 m	250 m

Multi-layer Pipe Plus S13, white, insulation blue, coils

MULTITUBO systems multi-layer pipe, with round insulation, thickness of insulation 13 mm, heat conductance rate (WLG) 040.



ArticleNo	Type	Coil	Palett
14410	16 x 2,00	50 m	400 m
14430	20 x 2,25	50 m	400 m
14440	25 x 2,50	50 m	250 m
14450	32 x 3,00	50 m	250 m

Multi-layer Pipe Plus S26, white, insulation blue, coils

MULTITUBO systems multi-layer pipe, with round insulation, thickness of insulation 26 mm, heat conductance rate (WLG) 040.



ArticleNo	Type	Coil	Palett
14510	16 x 2,00, blue, stretchwrapped, not cartonised	25 m	150 m
14530	20 x 2,25, blue, stretchwrapped, not cartonised	25 m	150 m
14540	25 x 2,50, blue, stretchwrapped, not cartonised	25 m	150 m
14550	32 x 3,00, blue, stretchwrapped, not cartonised	25 m	150 m
14560	40 x 4,00, blue, stretchwrapped, not cartonised	25 m	125 m

PIPES



Pipe Clip

To fix the pipe into position. Made of plastic with snap into place mechanism.

ArticleNo	Type	Bag	Carton
19310	16 - 20 mm	100 pcs	100 pcs
19340	25 mm	50 pcs	50 pcs
19350	32 mm	50 pcs	50 pcs

METAL-PRESSFITTING LEAD FREE



LF Metal-Press-MV Adapter

Press adapter for transitioning from Multitubo pipe to copper or stainless steel pipe. Lead-free brass according to EU DWD. MT pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U/UP, TH, H, or RFz profiles. CU/SST side to be pressed with M&V profiles. Both sides with leak-before-pressed function.

ArticleNo	Type	Bag	Carton
LF29810	16 x 2,00 - Cu/SST 15	10 pcs	200 pcs
LF29831	20 x 2,25 - Cu/SST 22	10 pcs	100 pcs
LF29832	20 x 2,25 - Cu/SST 15	10 pcs	100 pcs
LF29840	25 x 2,50 - Cu/SST 22	10 pcs	100 pcs
LF29850	32 x 3,00 - Cu/SST 28	10 pcs	100 pcs

METAL-PRESSFITTING UNCOATED



Metal-Press-Adapter MT, 14mm

Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe, conical male thread to DIN EN 10226-1 for sealing. To be pressed with U-profiles.

ArticleNo	Type	Bag	Carton
20000	14 x 1/2" MT	10 pcs	160 pcs

METAL-PRESSFITTINGS



G2 Metal-Press-Adapter MT, 16 mm - 32 mm

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent grey plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Conical external thread to DIN EN 10226-1 for sealing. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G220010	16 x 1/2" MT	10 pcs	200 pcs
G220012	16 x 3/8" FT	10 pcs	200 pcs
G220014	16 x 3/4" MT	10 pcs	200 pcs
G220030	20 x 1/2" MT	10 pcs	200 pcs
G220031	20 x 3/4" MT	10 pcs	170 pcs
G220032	20 x 1" MT	10 pcs	100 pcs
G220040	25 x 3/4" MT	10 pcs	100 pcs
G220041	25 x 1" MT	10 pcs	100 pcs
G220050	32 x 1" MT	10 pcs	80 pcs
G220051	32 x 1 1/4" MT	8 pcs	56 pcs

METAL-PRESSFITTINGS



Metal-Press-Adapter MT, 40 mm - 75 mm

Made of tin-plated brass, with press sleeve incl. inspection window for easy checking of the correct insertion depth of the pipe, conical male thread to DIN EN 10226-1 for sealing. To be pressed with U or TH profiles.

ArticleNo	Type	Bag	Carton
20060	40 x 1 1/4" MT	1 pc.	30 pcs
20061	40 x 1 1/2" MT	1 pc.	30 pcs
20071	50 x 2" MT	1 pc.	20 pcs
20070	50 x 1 1/2" MT	1 pc.	25 pcs
20080	63 x 2" MT	1 pc.	14 pcs
20090	75 x 2 1/2" MT	1 pc.	10 pcs

METAL-PRESSFITTINGS - UNCOATED



Metal-Press-Adapter FT, 14mm

Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe, cylindrical female thread to DIN EN 10226-1. To be pressed with U-profiles.

ArticleNo	Type	Bag	Carton
21000	14 x 1/2" FT	10 pcs	160 pcs

METAL-PRESSFITTINGS



G2 Metal-Press-Adapter FT, 16 mm - 32 mm

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent grey plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread according to DIN EN 10226-1. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G221010	16 x 1/2" FT	10 pcs	200 pcs
G221014	16 x 3/4" FT	10 pcs	180 pcs
G221030	20 x 1/2" FT	10 pcs	200 pcs
G221031	20 x 3/4" FT	10 pcs	180 pcs
G221032	20 x 1" FT	10 pcs	100 pcs
G221040	25 x 3/4" FT	10 pcs	100 pcs
G221041	25 x 1" FT	10 pcs	100 pcs
G221050	32 x 1" FT	10 pcs	80 pcs
G221051	32 x 1 1/4" FT	8 pcs	56 pcs

Metal-Press-Adapter FT, 40 mm - 75 mm



Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe, cylindrical female thread to DIN EN 10226-1. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
21061	40 x 1 1/4" FT	1 pc.	30 pcs
21062	40 x 1 1/2" FT	1 pc.	30 pcs
21071	50 x 1 1/2" FT	1 pc.	25 pcs
21080	63 x 2" FT	1 pc.	15 pcs
21090	75 x 2 1/2" FT	1 pc.	8 pcs

METAL-PRESSFITTINGS

G2 Metal-Press-Adapter 90° MT



The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Conical male thread to DIN EN 10226-1 for sealing. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G223012	16 x 3/8" MT	10 pcs	200 pcs
G223015	16 x 1/2" MT	10 pcs	200 pcs
G223035	20 x 1/2" MT	10 pcs	160 pcs
G223037	20 x 3/4" MT	10 pcs	120 pcs
G223045	25 x 3/4" MT	10 pcs	90 pcs
G223047	25 x 1" MT	6 pcs	54 pcs
G223055	32 x 1" MT	6 pcs	54 pcs

G2 Metal-Press-Adapter 90° FT



The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread to DIN EN 10226-1. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G223016	16 x 1/2" FT	10 pcs	180 pcs
G223036	20 x 1/2" FT	10 pcs	160 pcs
G223038	20 x 3/4" FT	10 pcs	100 pcs
G223046	25 x 3/4" FT	10 pcs	100 pcs
G223048	25 x 1" FT	6 pcs	54 pcs
G223056	32 x 1" FT	6 pcs	54 pcs

G2 Metal-Press-Elbow 90° 16 mm - 32 mm



The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G223010	16 x 16	10 pcs	200 pcs
G223030	20 x 20	10 pcs	150 pcs
G223040	25 x 25	10 pcs	80 pcs
G223050	32 x 32	4 pcs	44 pcs

Metal-Press-Elbow 90°, 40 mm - 75 mm



Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
23060	40 x 40	1 pc.	20 pcs
23070	50 x 50	1 pc.	14 pcs
23080	63 x 63	1 pc.	6 pcs
23090	75 x 75	1 pc.	4 pcs

METAL-PRESSFITTINGS

G2 Metal-Press-Elbow 45°



The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G223250	32 x 32	4 pcs	44 pcs

Metal-Press-Elbow 45°, 40 mm - 75 mm



Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
23260	40 x 40	1 pc.	20 pcs
23270	50 x 50	1 pc.	16 pcs
23280	63 x 63	1 pc.	8 pcs
23290	75 x 75	1 pc.	4 pcs

G2 Metal-Press-Tee 16 mm - 32 mm



The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G225010	16 x 16 x 16	10 pcs	130 pcs
G225030	20 x 20 x 20	10 pcs	100 pcs
G225040	25 x 25 x 25	4 pcs	40 pcs
G225050	32 x 32 x 32	4 pcs	32 pcs

Metal-Press-Tee, 40 mm - 75 mm



Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
25060	40 x 40 x 40	1 pc.	16 pcs
25070	50 x 50 x 50	1 pc.	10 pcs
25080	63 x 63 x 63	1 pc.	3 pcs
25090	75 x 75 x 75	1 pc.	3 pcs

G2 Metal-Press-Tee, reduced, 16 mm - 32 mm



The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G225011	16 x 20 x 16	10 pcs	100 pcs
G225031	20 x 16 x 16	10 pcs	100 pcs
G225032	20 x 16 x 20	10 pcs	100 pcs
G225033	20 x 20 x 16	10 pcs	100 pcs
G225037	20 x 25 x 20	4 pcs	60 pcs
G225048	25 x 16 x 16	4 pcs	60 pcs
G225047	25 x 16 x 20	4 pcs	60 pcs
G225041	25 x 16 x 25	4 pcs	60 pcs

METAL-PRESSFITTINGS



Continuation of G2 Metal-Press-Tee, reduced, 16 mm - 32 mm

ArticleNo	Type	Bag	Carton
G225042	25 x 20 x 20	4 pcs	60 pcs
G225043	25 x 20 x 25	4 pcs	48 pcs
G225049	25 x 25 x 16	4 pcs	48 pcs
G225057	25 x 32 x 25	4 pcs	32 pcs
G225054	32 x 16 x 32	4 pcs	40 pcs
G225051	32 x 20 x 32	4 pcs	40 pcs
G225053	32 x 25 x 25	4 pcs	40 pcs
G225052	32 x 25 x 32	4 pcs	32 pcs



Metal-Press-Tee, reduced, 40 mm - 75 mm

Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
25061	40 x 20 x 40	1 pc.	20 pcs
25067	40 x 25 x 32	1 pc.	18 pcs
25062	40 x 25 x 40	1 pc.	18 pcs
25063	40 x 32 x 32	1 pc.	18 pcs
25064	40 x 32 x 40	1 pc.	16 pcs
25076	50 x 25 x 40	1 pc.	12 pcs
25072	50 x 25 x 50	1 pc.	12 pcs
25073	50 x 32 x 50	1 pc.	12 pcs
25074	50 x 40 x 50	1 pc.	10 pcs
25081	63 x 25 x 63	1 pc.	6 pcs
25082	63 x 32 x 63	1 pc.	6 pcs
25083	63 x 40 x 63	1 pc.	4 pcs
25084	63 x 50 x 63	1 pc.	4 pcs
25092	75 x 40 x 75	1 pc.	4 pcs
25093	75 x 50 x 75	1 pc.	4 pcs



G2-Metal Press-Tee MT, 16 mm - 32 mm

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Conical male to DIN EN 10226-1 for sealing. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G225110	16 x 1/2" MT x 16	10 pcs	100 pcs
G225140	25 x 3/4" MT x 25	4 pcs	44 pcs
G225150	32 x 3/4" MT x 32	4 pcs	40 pcs



G2 Metal-Press-Tee FT, 16 mm - 32 mm

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread to DIN EN 10226-1. Can be crimped with U or TH profiles.

ArticleNo	Type	Bag	Carton
G225015	16 x 1/2" FT x 16	10 pcs	100 pcs
G225035	20 x 1/2" FT x 20	10 pcs	100 pcs
G225038	20 x 3/4" FT x 20	10 pcs	80 pcs
G225045	25 x 1/2" FT x 25	4 pcs	48 pcs

95000-al-gb-26

METAL-PRESSFITTINGS



Continuation of G2 Metal-Press-Tee FT, 16 mm - 32 mm

ArticleNo	Type	Bag	Carton
G225046	25 x 3/4" FT x 25	4 pcs	44 pcs
G225056	32 x 1/2" FT x 32	4 pcs	40 pcs
G225055	32 x 3/4" FT x 32	4 pcs	40 pcs



Metal-Press-Tee FT, 40 mm - 75 mm

Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe, cylindrical female thread to DIN EN 10226-1. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
25066	40 x 1" FT x 40	1 pc.	20 pcs
25075	50 x 1" MT x 50	1 pc.	14 pcs
25085	63 x 1" FT x 63	1 pc.	6 pcs
25095	75 x 1" FT x 75	1 pc.	3 pcs



G2-Metal-Press-Coupling, 16 mm - 32 mm

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G227010	16 x 16	10 pcs	200 pcs
G227030	20 x 20	10 pcs	160 pcs
G227040	25 x 25	10 pcs	100 pcs
G227050	32 x 32	10 pcs	60 pcs



Metal-Press-Coupling, 40 mm - 75 mm

Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
27060	40 x 40	1 pc.	30 pcs
27070	50 x 50	1 pc.	20 pcs
27080	63 x 63	1 pc.	10 pcs
27090	75 x 75	1 pc.	8 pcs



G2-Metal-Press-Coupling, reduced, 16 mm - 32 mm

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G227031	20 x 16	10 pcs	160 pcs
G227041	25 x 16	10 pcs	120 pcs
G227042	25 x 20	10 pcs	120 pcs
G227051	32 x 20	10 pcs	80 pcs
G227052	32 x 25	10 pcs	80 pcs

METAL-PRESSFITTINGS



Metal-Press-Coupling, reduced, 40 mm - 75 mm

Made of tin-plated brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
27062	40 x 25	1 pc.	40 pcs
27061	40 x 32	1 pc.	36 pcs
27072	50 x 32	1 pc.	25 pcs
27071	50 x 40	1 pc.	20 pcs
27081	63 x 40	1 pc.	15 pcs
27082	63 x 50	1 pc.	10 pcs
27091	75 x 40	1 pc.	8 pcs
27092	75 x 50	1 pc.	8 pcs
27093	75 x 63	1 pc.	8 pcs



G2 Metal-Press-Screw-Connection FT

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G228012	16 x 3/8" FT	10 pcs	200 pcs
G228011	16 x 1/2" FT	10 pcs	200 pcs
G228010	16 x 3/4" FT	10 pcs	200 pcs
G228031	20 x 1/2" FT	10 pcs	200 pcs
G228030	20 x 3/4" FT	10 pcs	200 pcs
G228041	25 x 3/4" FT	10 pcs	100 pcs
G228040	25 x 1" FT	10 pcs	100 pcs
G228050	32 x 1 1/4" FT	8 pcs	64 pcs



G2 Metal-Press-Tab-Connection Elbow FT, with flange

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread according to DIN EN 10226-1. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G229013	16 x 3/8" FT	10 pcs	100 pcs
G229010	16 x 1/2" FT	10 pcs	100 pcs
G229012	16 x 1/2" FT	10 pcs	100 pcs
G229030	20 x 1/2" FT	10 pcs	100 pcs
G229031	20 x 3/4" FT	10 pcs	80 pcs
G229040	25 x 3/4" FT	6 pcs	54 pcs



G2 Double-Press-Tab-Connection Elbow FT, with flange

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread according to DIN EN 10226-1. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G229410	16 x 1/2" FT x 16	8 pcs	56 pcs
G229430	20 x 1/2" FT x 20	8 pcs	56 pcs

METAL-PRESSFITTINGS



Metal-Press-Tab-Connection Elbow FT U, with flange

Made of tin-plated brass with press sleeve with inspection window.

ArticleNo	Type	Bag	Carton
29415	16 x 1/2" FT x 16	10 pcs	50 pcs
29435	20 x 1/2" FT x 20	10 pcs	50 pcs



Mounting set "Gemini"

Mounting plate with 2 Metal-Press-Tab-Connection Elbows FT, with flange, made of tin-plated brass with press sleeve with inspection window, premounted. To be pressed with U-/UP-, TH-, H- or RFz-profiles.

ArticleNo	Type	Bag	Carton
G229318	16 x 1/2" FT - 120 mm	1 pc.	10 pcs
G229321	16 x 1/2" FT - 150 mm	1 pc.	10 pcs



Mounting Set

Mounting plate with 2 Metal-Press-Tab-Connection Elbows FT, with flange, made of tin-plated brass with press sleeve with inspection window, premounted. To be pressed with U-/UP-, TH-, H- or RFz-profiles.

ArticleNo	Type	Bag	Carton
G229315	16 x 1/2" FT - 150 mm	1 pc.	10 pcs
G229375	16 x 1/2" FT - 75 mm	1 pc.	10 pcs



Metal Press Mounting Set - noise absorbing

Mounting plate with 2 G2 Metal-Press-Tab-Connection Elbows FT with flange, made of tin-plated brass, pressing sleeve with inspection holes, premounted, noise absorbing. To be pressed with U-/UP-, TH-, H- or RFz-profiles.

ArticleNo	Type	Bag	Carton
G229315S	16 x 1/2" FT - 150 mm, premounted	1 pc.	9 pcs



G2 Metal-Press-Tab-Connection for wall penetration

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread according to DIN EN 10226-1. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G229110	16 x 1/2" FT	8 pcs	48 pcs



G2-Metal-Press-UPS-Connection Elbow

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread according to DIN EN 10226-1. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G229210	16 x 1/2" FT	10 pcs	80 pcs

METAL-PRESSFITTINGS



G2 Metal-Press Connection Elbow Geberit

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Cylindrical female thread according to DIN EN 10226-1. For the connection of MULTITUBO systems multi-layer pipes 16 x 2.00 to the flushing tanks Geberit (from 2002) and all MeplaFix 1/2" MT. To be pressed with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G229215	16 x 1/2" FT	10 pcs	180 pcs

METAL-PRESSFITTINGS - UNCOATED



Metal-Press-Tee, reduced, 40 mm - 75 mm

Made of brass with press sleeve with inspection window for easy checking of the correct insertion depth of the pipe. To be pressed with U- or TH-profiles.

ArticleNo	Type	Bag	Carton
F25058	32 x 40 x 32	1 pc.	16 pcs
F25068	40 x 50 x 40	1 pc.	10 pcs
F25078	50 x 63 x 50	1 pc.	3 pcs
F25088	63 x 75 x 63	1 pc.	3 pcs



G2-Metal-Press-Screw-Connection FT (swivel nut), 16 mm - 32 mm

Made of brass with press sleeve with inspection window and flat gasket. Detachable fitting for the surface-mounted connection of filters and valves.

ArticleNo	Type	Bag	Carton
G2F28051	32 x 1" FT	10 pcs	80 pcs



Metal-Press-Screw-Connection FT (swivel nut), 40 mm - 63 mm

Made of brass with press sleeve with inspection window and flat gasket. Detachable fitting for the surface-mounted connection of filters and valves.

ArticleNo	Type	Bag	Carton
F28061	40 x 1 1/4" FT	1 pc.	40 pcs
F28060	40 x 1 1/2" FT	1 pc.	32 pcs
F28070	50 x 2" FT	1 pc.	20 pcs
F28080	63 x 2" FT	1 pc.	15 pcs



G2 Metal-Press-Elbow 90° FT (swivel nut)

Made of brass with press sleeve with inspection window and flat gasket. Detachable fitting for the surface-mounted connection of filters and valves.

ArticleNo	Type	Bag	Carton
G2F23013	16 x 1/2" FT	10 pcs	180 pcs
G2F23033	20 x 1/2" FT	10 pcs	150 pcs
G2F23034	20 x 3/4" FT	10 pcs	120 pcs
G2F23044	25 x 3/4" FT	10 pcs	100 pcs

METAL-PRESSFITTINGS



G2 Metal-Press-End Plug

The new fitting generation G2, made of tin-plated brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G229510	16 mm	10 pcs	200 pcs
G229530	20 mm	10 pcs	200 pcs



Metal-Press-End Plug 25

Made of brass, without exhaust valve, for permanent closing of the pipes.

ArticleNo	Type	Bag	Carton
29540	25 mm	10 pcs	250 pcs
29550	32 mm	10 pcs	200 pcs

PPSU-PRESSFITTINGS



PPSU-Press-Adapter MT, 16 mm - 32 mm

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Conical male thread to DIN EN 10226-1 for sealing. Can be pressed with U/UP, TH, H, and RFz profiles.

ArticleNo	Type	Bag	Carton
50010	16 x 1/2" MT	10 pcs	200 pcs
50030	20 x 1/2" MT	10 pcs	200 pcs
50031	20 x 3/4" MT	10 pcs	170 pcs
50040	25 x 3/4" MT	10 pcs	100 pcs
50050	32 x 1" MT	10 pcs	80 pcs



PPSU-Press-Adapter 90° MT, 16 mm - 32 mm

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Conical male thread to DIN EN 10226-1 for sealing. Can be pressed with U/UP, TH, H, and RFz profiles.

ArticleNo	Type	Bag	Carton
53015	16 x 1/2" MT	10 pcs	200 pcs
53035	20 x 1/2" MT	10 pcs	160 pcs
53037	20 x 3/4" MT	10 pcs	120 pcs
53045	25 x 3/4" MT	10 pcs	90 pcs
53055	32 x 1" MT	6 pcs	54 pcs



PPSU-Press-Elbow 90°, 16 mm - 32 mm

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U/UP-, TH-, H-, and RFz- profiles.

ArticleNo	Type	Bag	Carton
53010	16 x 16	10 pcs	200 pcs
53030	20 x 20	10 pcs	150 pcs
53040	25 x 25	10 pcs	80 pcs
53050	32 x 32	4 pcs	44 pcs

PPSU-PRESSFITTINGS



PPSU-Press-Elbow 90°, 40 mm - 63 mm

Made of PPSU, pressing sleeve with inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U- and TH-profiles.

ArticleNo	Type	Bag	Carton
53060	40 x 40	2 pcs	30 pcs
53070	50 x 50	2 pcs	14 pcs
53080	63 x 63	1 pc.	8 pcs



PPSU-Press-Tee, 16 mm - 32 mm

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U/UP-, TH-, H-, and RFz- profiles.

ArticleNo	Type	Bag	Carton
55010	16 x 16 x 16	10 pcs	150 pcs
55030	20 x 20 x 20	10 pcs	100 pcs
55040	25 x 25 x 25	4 pcs	40 pcs
55050	32 x 32 x 32	4 pcs	32 pcs



PPSU Press-Tee, 40 mm - 63 mm

Made of PPSU, pressing sleeve with inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U- and TH-profiles.

ArticleNo	Type	Bag	Carton
55060	40 x 40 x 40	1 pc.	18 pcs
55070	50 x 50 x 50	1 pc.	10 pcs
55080	63 x 63 x 63	1 pc.	4 pcs



PPSU-Press-Tee, reduced

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U/UP-, TH-, H-, and RFz- profiles.

ArticleNo	Type	Bag	Carton
55011	16 x 20 x 16	10 pcs	100 pcs
55031	20 x 16 x 16	10 pcs	100 pcs
55032	20 x 16 x 20	10 pcs	100 pcs
55033	20 x 20 x 16	10 pcs	100 pcs
55041	25 x 16 x 25	4 pcs	60 pcs
55042	25 x 20 x 20	4 pcs	60 pcs
55043	25 x 20 x 25	4 pcs	48 pcs
55051	32 x 20 x 32	4 pcs	40 pcs
55053	32 x 25 x 25	4 pcs	40 pcs
55052	32 x 25 x 32	4 pcs	32 pcs



PPSU Press-Coupling, 14 mm

Made of PPSU with press sleeve, incl. inspection-window.

ArticleNo	Type	Bag	Carton
57000	14 x 14	10 pcs	160 pcs
57011	16 x 14	10 pcs	160 pcs

PPSU-PRESSFITTINGS



PPSU-Press-Coupling, 16 mm - 32 mm

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U/UP-, TH-, H-, and RFz- profiles.

ArticleNo	Type	Bag	Carton
57010	16 x 16	10 pcs	200 pcs
57030	20 x 20	10 pcs	160 pcs
57040	25 x 25	10 pcs	100 pcs
57050	32 x 32	10 pcs	60 pcs



PPSU Press-Coupling, 40 mm - 63 mm

Made of PPSU, pressing sleeve with inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U- and TH-profiles.

ArticleNo	Type	Bag	Carton
57060	40 x 40	2 pcs	40 pcs
57070	50 x 50	2 pcs	22 pcs
57080	63 x 63	1 pc.	12 pcs



PPSU-Press-Coupling, reduced, 16 mm - 32 mm

Made of PPSU, pressing sleeve with double pressing jaw stop. Stop ring made of transparent, gray plastic with 360° inspection window for easy checking of the correct insertion depth of the pipe. Can be pressed with U/UP-, TH-, H-, and RFz- profiles.

ArticleNo	Type	Bag	Carton
57031	20 x 16	10 pcs	160 pcs
57041	25 x 16	10 pcs	120 pcs
57042	25 x 20	10 pcs	120 pcs
57052	32 x 25	10 pcs	80 pcs



PPSU Press-Transition-Coupling

Special connection for changing from TH contour (20 x 2.00 mm) to U contour (20 x 2.25 mm). The special profile To be pressed on both sides for both the TH contour and the U contour. Made of PPSU, press sleeves incl. window for checking the correct insertion depth of the tube.

ArticleNo	Type	Bag	Carton
57030MM	20 x 2.25 - 20 x 2.00	10 pcs	160 pcs
57040MM	25 x 2.50 - 26 x 3.00	10 pcs	100 pcs

METAL-PRESSFITTINGS MODULAR



MODULAR Adapter

With press sleeve with inspection window for easy control of the correct insertion depth of the pipe the connection of base body or adapter with gripper clamp and sealing. To be pressed with U-profiles.

ArticleNo	Type	Carton	Carton
M22025	25 x 2,50	1 pc.	6 pcs
M22032	32 x 3,00	1 pc.	6 pcs
M22040	40 x 4,00	1 pc.	6 pcs
M22050	50 x 4,50	1 pc.	6 pcs
M22063	63 x 6,00	1 pc.	6 pcs
M22075	75 x 7,50	1 pc.	6 pcs
M22090	90 x 8,50	1 pc.	6 pcs
M22110	110 x 10,00	1 pc.	6 pcs

METAL-PRESSFITTINGS MODULAR

Base Body Elbow 90°

Made of stainless steel.



ArticleNo	Type	Carton	Carton
M23000	90°	1 pc.	2 pcs

Base Body Elbow 45°

Made of stainless steel.



ArticleNo	Type	Carton	Carton
M23200	45°	1 pc.	2 pcs

Base Body Tee

Made of stainless steel.



ArticleNo	Type	Carton	
M25000	3"	1 pc.	pc.

Adapter MT

Made of stainless steel.



ArticleNo	Type	Carton	Carton
M20212	2 1/2" MT	1 pc.	6 pcs
M20300	3" MT	1 pc.	6 pcs
M20400	4" MT	1 pc.	6 pcs

Adapter FT

Made of stainless steel.



ArticleNo	Type	Carton	Carton
M21034	3/4" FT	1 pc.	16 pcs
M21114	1 1/4" FT	1 pc.	6 pcs
M21112	1 1/2" FT	1 pc.	6 pcs
M21200	2" FT	1 pc.	6 pcs
M21212	2 1/2" FT	1 pc.	6 pcs
M21300	3" MT	1 pc.	6 pcs

Blind Cap

Made of stainless steel.



ArticleNo	Type	Carton	Carton
M29500	3"	1 pc.	16 pcs



Flange

Made of stainless steel, PN 16, for connecting adapters or base bodies with gripper clamp and sealing. Type: Pitch circle diameter mm (Pc) / screw holes (number x diameter mm) (d) / flange diameter mm (OD).



ArticleNo	Type	Carton	Carton
M27300	3" - Pc 160 / d 8 x 18 / OD 200	1 pc.	3 pcs
M27400	4" - Pc 180 / d 8 x 18 / AD 220	1 pc.	3 pcs

MODULAR 90/110, MODULES

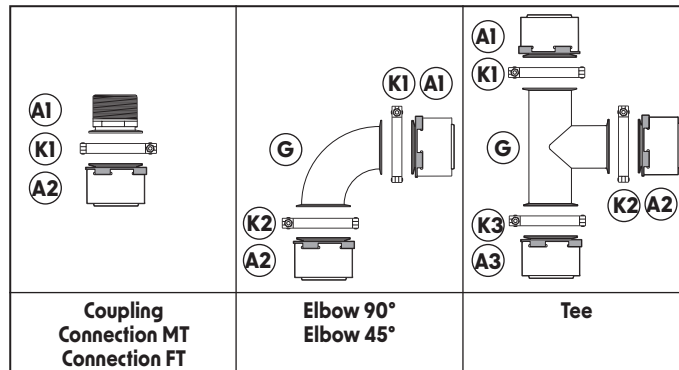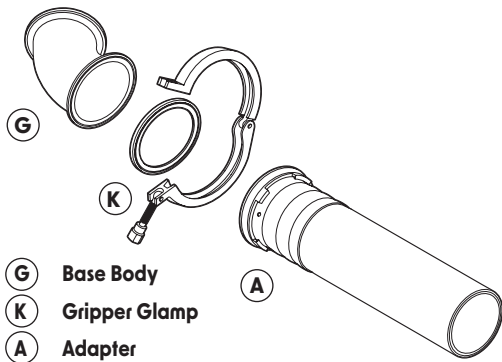

Type	Adapter 1 (A1)	Gripper-Clamp 1 (K1)	Elbow/ Tee (G)	Adapter 2 (A2)	Gripper-Clamp 2 (K2)	Adapter 3 (A3)	Gripper-Clamp 3 (K3)	alternative*
Connection AG								
75 x 2 1/2" AG	(M22075)	(M28000)		(M20212)				20090
90 x 3" AG	M22090	M28000		M20300				
110 x 3" AG	M22110	M28000		M20300				
Connection IG								
75 x 2 1/2" IG	(M22075)	(M28000)		(M21212)				21090
90 x 3" IG	M22090	M28000		M21300				
110 x 3" IG	M22110	M28000		M21300				
Elbow 90°								
75 x 75	(M22075)	(M28000)	(M23000)	(M22075)	(M28000)			23090
90 x 90	M22090	M28000	M23000	M22090	M28000			
110 x 110	M22110	M28000	M23000	M22110	M28000			
Elbow 45°								
75 x 75	(M22075)	(M28000)	(M23200)	(M22075)	(M28000)			23290
90 x 90	M22090	M28000	M23200	M22090	M28000			
110 x 110	M22110	M28000	M23200	M22110	M28000			
Elbow 90° AG								
75 x 2 1/2" AG	M22075	M28000	M23000	M20212	M28000			
90 x 3" AG	M22090	M28000	M23000	M20300	M28000			
110 x 3" AG	M22110	M28000	M23000	M20300	M28000			
Tee								
75 x 75 x 75	(M22075)	(M28000)	(M25000)	(M22075)	(M28000)	(M22075)	(M28000)	25090
75 x 110 x 25	M22075	M28000	M25000	M22110	M28000	M22025	M28000	
90 x 32 x 90	M22090	M28000	M25000	M22032	M28000	M22090	M28000	
90 x 75 x 90	M22090	M28000	M25000	M22075	M28000	M22090	M28000	
90 x 90 x 90	M22090	M28000	M25000	M22090	M28000	M22090	M28000	
90 x 110 x 90	M22090	M28000	M25000	M22110	M28000	M22090	M28000	
110 x 25 x 90	M22110	M28000	M25000	M22025	M28000	M22090	M28000	
110 x 90 x 110	M22110	M28000	M25000	M22090	M28000	M22110	M28000	
110 x 110 x 110	M22110	M28000	M25000	M22110	M28000	M22110	M28000	
Coupling								
75 x 63	(M22075)	(M28000)		(M22063)				27093
75 x 75	(M22075)	(M28000)		(M22075)				27090
90 x 75	M22090	M28000		M22075				
90 x 90	M22090	M28000		M22090				
110 x 75	M22110	M28000		M22075				
110 x 90	M22110	M28000		M22090				
110 x 110	M22110	M28000		M22110				

* In addition to the Modular line, users can choose from our line of press fittings up to 75 mm. This means that ready-made solutions are already available for many applications.

METAL-PRESSFITTINGS MODULAR

Gripper Clamp with Sealing

Made of steel.



ArticleNo	Type	Bag	Carton
M28000	3"	1 pc.	10 pcs

Replacement Sealing for Gripper Clamp MODULAR

Replacement sealing ring for the connection of MODULAR components (adapters, base bodies and connections) with gripper clamp.



ArticleNo	Type	Bag	Carton
M28010	Substitution sealing 3"	5 pcs	200 pcs

ACCESSORIES - UNIVERSAL

Screw Connector for Cu-Pipe

For connecting press radiator connections and SL bends or angles (Cu-pipe) to 3/4" euro-cone, elastic sealing.



ArticleNo	Type	Bag	Carton
19050	3/4' FT x 15	2 pcs	50 pcs

Screw Connector for Euro-Cone

Made of brass, plated nut, fits to euro-cone connections. 1 piece comprises: 1 swivel nut, 1 clamp ring, 1 pipe insert.



ArticleNo	Type	Bag	Carton
19005	14 x 3/4" FT	1 pc.	250 pcs
19010	16 x 3/4"	2 pcs	200 pcs
19030	20 x 3/4'	2 pcs	200 pcs

Compression Adapter for copper pipes

Made of brass. For connections between MULTITUBO multilayer pipe and copper pipe.



ArticleNo	Type	Bag	Carton
79710	16 x 2,00 - Cu 15	10 pcs	200 pcs
79711	16 x 2,00 - Cu 15, nut non-plated	10 pcs	200 pcs
79731	20 x 2,25 - Cu 22	5 pcs	150 pcs

Double Nipple for Euro-Cone

Made of nickel-plated brass.



ArticleNo	Type	Bag	Carton
19100	3/4" x 3/4"	10 pcs	200 pcs

Ball Valve

Made of plated brass, flat sealing, for use with manifolds. 1 set containing 2 pieces of ball valves.



ArticleNo	Type	Bag	Carton
18501	1" MT x 3/4" FT	1 Paar	Paar
18502	1" MT x 1" FT	1 Paar	Paar

ACCESSORIES - TAP WATER



Sound Insulation-Set

Made of vulcanized rubber, consists of sound absorbing element and protection cap fits to press and push tap connection elbows 3/8" and 1/2".

ArticleNo	Type	Bag	Carton
19810	for wall-mounted elbows	5 pcs	40 pcs



Sound Insulation-Set "U"

Made of vulcanized rubber, consists of sound absorbing element and protection cap fits to press and push U-tap connection elbows 1/2".

ArticleNo	Type	Bag	Carton
19815	for U-wall-mounted elbows	5 pcs	40 pcs



Sound absorbing element

Made of vulcanized rubber, sound separator for use in conjunction with all MULTITUBO press- and push-tap connection elbows.

ArticleNo	Type	Bag	Carton
19817	for press-/push-tap connection elbows	10 pcs	100 pcs



Mounting Track

Made of galvanized steel, for all installation clearances, 2 m long.

ArticleNo	Type	Unit	Carton
19800	200cm	1 pc.	10 pcs



Mounting Track, edged

Made of galvanized steel, for installation clearances 75 mm and 150 mm, suitable for press-tap connection elbow FT with flange, including 6 screws.

ArticleNo	Type	Unit	Carton
19805	75/150 mm	1 pc.	10 pcs



Mounting Plate „Gemini“

Made of galvanized steel, for installation clearances of 120 mm/150 mm suitable for press-tap connection elbow FT with flange.

ArticleNo	Type	Carton	Carton
70318	180 mm	1 pc.	10 pcs
70321	210 mm	1 pc.	10 pcs



Double Mounting Plate

Made of galvanized steel, for different installation clearances suitable for press-tap connection elbow FT with flange, including 6 screws.

ArticleNo	Type	Bundle	Carton
70210	75 mm	1 pc.	10 pcs
70218	100 mm	1 pc.	10 pcs
70212	150 mm	1 pc.	10 pcs

ACCESSORIES - TAP WATER

Mounting Plate

Made of galvanized steel, suitable for one press-tap connection elbow FT with flange, including 3 screws.



ArticleNo	Type	Bundle	Carton
70215	80 mm	1 pc.	10 pcs

Manifold for Tap Water

Made of brass, with 1" MT and 1" FT connection and 3/4" MT outlet connection. Compatible with MULTITUBO systems screw connector for euro-cone.



ArticleNo	Type	Carton	Carton
19922	2 - way	1 pc.	50 pcs
19923	3 - way	1 pc.	25 pcs
19924	4 - way	1 pc.	20 pcs

Manifold Bracket

Made of galvanized steel, for the sound absorbing installation of manifold for tap water.



ArticleNo	Type	Carton	Carton
19930	200 mm	1 pc.	35 pcs

Cap

Made of brass, for use with manifold for tap water.



ArticleNo	Type	Carton	Carton
19940	1" IG	5 pcs	200 pcs

Screw Plug

Made of brass, for use with manifold for tap water.



ArticleNo	Type	Carton	Carton
19950	1" AG	5 pcs	150 pcs

ACCESSORIES - HEATING

Cabinet Concealed

Made of galvanized steel, with demountable and adjustable door, in wall use. Depth: 110-150mm.




ArticleNo	Type	Carton	Carton
18601	Type 1	1 pc.	pc.
18602	Type 2	1 pc.	pc.
18603	Type 3	1 pc.	pc.
18604	Type 4	1 pc.	pc.

ACCESSORIES - RADIATOR CONNECTION


Manifold H for Radiator-Connection

Stainless steel manifold 1" for radiator connection system, 3/4" euro-cone connection and air vent valve 1/2" including holder.



ArticleNo	Type	Carton	Carton
18402	2 circuits	1 pc.	pc.
18403	3 circuits	1 pc.	pc.

ACCESSORIES - RADIATOR CONNECTION



Continuation of Manifold H for Radiator-Connection

ArticleNo	Type	Carton	Carton
18404	4 circuits	1 pc.	pc.
18405	5 circuits	1 pc.	pc.
18406	6 circuits	1 pc.	pc.
18407	7 circuits	1 pc.	pc.
18408	8 circuits	1 pc.	pc.
18409	9 circuits	1 pc.	pc.
18410	10 circuits	1 pc.	pc.
18411	11 circuits	1 pc.	pc.
18412	12 circuits	1 pc.	pc.



Radiator Connection Box

Made from PST for premounted in wall radiator connections, including bended pipe for pressure test of installed pipe. Simple installation by integrated mounting track. Pipe distance 50 mm (valve for compact radiator).

ArticleNo	Type	Carton	Carton
19200	16 mm	1 pc.	10 pcs

METAL-PRESSFITTINGS



G2 Metal-Press-Radiator-Connection Elbow

The new fitting generation G2, made of brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G223508	16 x 150 mm - Cu 12 mm	2 pcs	60 pcs
G223509	16 x 150 mm - Cu 15 mm	2 pcs	60 pcs
G223510	16 x 330 mm - Cu 15 mm	2 pcs	60 pcs




G2 Metal-Press-Radiator-Connection Tee

The new fitting generation G2, made of brass, pressing sleeve with double pressing jaw guide. Stop ring made of transparent plastic with 360° viewing window for easy checking of the correct insertion depth of the pipe. Improved zeta value, leaks when not pressed. Can be crimped with U, TH, H or RFz profiles.

ArticleNo	Type	Bag	Carton
G225510	16 x 330 mm	1 pc.	30 pcs
G225530	20 x 330 mm	1 pc.	20 pcs

ACCESSORIES - RADIANT HEATING




Manifold FBH for Underfloor heating, euro-cone

Stainless steel manifold for underfloor heating, primary side with 1" swivel nut incl. flat gasket, secondary side outlets with screw connection 3/4" euro-cone (Art.: 19010/19030), including air vent valve 1/2" and holder with noise absorbing inlays. With adjustable and shut-off inserts (topmeter) flow adjustment in supply manifold. Return manifold with valve insert with male thread M30 x 1.5 for direct mounting of the actuators. Supplied without ball valves.

ArticleNo	Type	Carton	Carton
18302	2 circuits	1 pc.	pc.
18303	3 circuits	1 pc.	pc.
18304	4 circuits	1 pc.	pc.
18305	5 circuits	1 pc.	pc.

ACCESSORIES - RADIANT HEATING



Continuation of Manifold FBH for Underfloor heating, euro-cone

ArticleNo	Type	Carton	Carton
18306	6 circuits	1 pc.	pc.
18307	7 circuits	1 pc.	pc.
18308	8 circuits	1 pc.	pc.
18309	9 circuits	1 pc.	pc.
18310	10 circuits	1 pc.	pc.
18311	11 circuits	1 pc.	pc.
18312	12 circuits	1 pc.	pc.



Actuator 230V

Suitable for FBH-manifold (ref. 18102 - 18112), 230 V. Connection M30 x 15, currentlessly closed, length of cable 1 m.

ArticleNo	Type	Carton	Carton
40100	for UFH manifolds	1 pc.	60 pcs



Actuator 24V

Suitable for FBH-manifold (ref. 18102 - 18112), 24 V. Connection M30 x 15, currentlessly closed, length of cable 1 m.

ArticleNo	Type	Carton	Carton
40101	for UFH manifolds	1 pc.	60 pcs



Pipe Positioning Panel

Pipe positioning panel, designed to simplify the installation of MULTITUBO systems pipes 14 to 20 mm. Height of the panel: 23 mm. Dimensions of each panel: 1,275 m x 0,975 m. Effectively panel surface: 1,2 m x 0,9 m (1,08 m²). Each carton contains 22,32 m².

ArticleNo	Type	Carton	Pallet
40020	For pipes Dim. 14 mm - 20 mm	22,32 m²	178,56



Multi-Foil

Multi-layer reflective/sound insulating foil, load capacity: 10 kN/m².

ArticleNo	Type	Roll	
40010	Foilthickness 4 mm	60 m²	m²



Clamp Track

Self-adhesive universal clip rail made of plastic, for pipe dimensions 14 - 17 mm. Length of the track: 1,00 m.

ArticleNo	Type	Carton	Pallet
40075	For pipes Dim. 14 mm - 17 mm	100 m	2400 m



Edging Strip

Edging strip, made of polyethylene with self-adhesive backing, self-adhesive strip on outer face provides tight seal between edging strip and insulation. Supplied in plastic bag of 400 m (8 rolls of 50 m).

ArticleNo	Type	Roll	Bag
40060	150 / 10 mm	50 m	400 m

ACCESSORIES - HEATING



FERROGUARD

MULTITUBO compact magnetite separator Basic for DN25 heating circulation pumps

ArticleNo	Type	Carton	
40500	MK I Basic DN 25	1 pc.	pc.

TOOLS UNIVERSAL



Precision pipe cutting pliers, 16 - 20 mm

Precision pipe cutting pliers for most efficient and fast cutting of MULTITUBO systems pipes, diameter 14 mm up to 20 mm.

ArticleNo	Type	Unit	Carton
30020	16 mm - 20 mm	1 pc.	pc.



Pipe cutting tool, 20 - 75 mm

Pipe cutting tool for MULTITUBO systems multi-layer pipes from 20 mm up to 75 mm.

ArticleNo	Type	Unit	Carton
30030	20 mm - 75 mm	1 pc.	pc.



Pipe cutting tool, 50 - 110 mm

Pipe cutting tool for MULTITUBO systems multi-layer pipes from 50 mm up to 110 mm.

ArticleNo	Type	Unit	Carton
30031	50 mm - 110 mm	1 pc.	pc.



Pipe cutting tool, 63 - 110 mm

Pipe cutting tool for MULTITUBO alu-multi-layer pipes 63/75/90/110 mm, cutting to length and bevelling in one step, supplied in case.

ArticleNo	Type	Unit	Carton
30039	63 mm - 110 mm	1 pc.	pc.



Bevelling Tool with handle, 16 - 32 mm

For bevelling of the MULTITUBO systems multi-layer pipes. The handle is firmly attached to the bevelling tool, not removable.

ArticleNo	Type	Unit	
30210	16	1 pc.	pc.
30230	20	1 pc.	pc.
30240	25	1 pc.	pc.
30250	32	1 pc.	pc.



Bevelling Tool with Handle, 40 - 75 mm

For bevelling of the MULTITUBO systems multi-layer pipes.

ArticleNo	Type	Unit	Carton
30160	40	1 pc.	pc.
30170	50	1 pc.	pc.
30180	63	1 pc.	pc.
30190	75	1 pc.	pc.

TOOLS UNIVERSAL



3-size Beveling tool

3 size bevelling to calibrate MULTITUBO pipes 16 x 2.00 mm, 20 x 2.25 mm and 25 x 2.50 mm.

ArticleNo	Type	Unit	Carton
30281	16/20/25	1 pc.	pc.



Handle for Beveling Tool

Ergonomically designed handle with quick exchange mechanism for use of beveling inserts 16 / 20 / 25 / 32 mm.

ArticleNo	Type	Unit	Carton
30050	16 mm - 32 mm	1 pc.	pc.



Beveling-Insert

For bevelling of the MULTITUBO systems multi-layer pipes in combination with handle or as an attachment for cordless-screwdriver. (useable with max. 500 rpm)

ArticleNo	Type	Unit	Carton
30110	16	1 pc.	pc.
30130	20	1 pc.	pc.
30140	25	1 pc.	pc.
30150	32	1 pc.	pc.



Beveling-Inserts, Set in case

Bevelling tool set 16 / 20 / 25 / 32 (useable with max. 500 rpm) with exchange mechanism, delivered in a stable plastic case.

ArticleNo	Type	Unit	Carton
30040	16/20/25/32	1 pc.	pc.



Empty case for deburring inserts 16/20/25/32

Sturdy plastic case for storing the deburring inserts and interchangeable handle 16 / 20 / 25 / 32 (art. no. 30110/30130/30140/30150).

ArticleNo	Type	Unit	Carton
30041	Empty case 16/20/25/32	1 pc.	pc.



Beveling Tool MULTIWELD

For beveling the MULTITUBO systems multilayer pipes, only when using Welding-fittings and MODULAR System.

ArticleNo	Type	Unit	Carton
38300	for Welding Fittings	1 pc.	pc.



Pipe uncoiler, 3 arm

3-arm pipe uncoiler, especially designed to be used with pipe coils of max. 200 m.

ArticleNo	Type	Unit	Carton
33000	3 - arm	1 pc.	pc.

TOOLS UNIVERSAL



Pipe uncoiler, 4 arm

4-arm pipe uncoiler, especially designed to be used with pipe coils of max. 500 m.

ArticleNo	Type	Unit	Carton
33010	4 - arm	1 pc.	pc.



Pipe straightener, 16 - 25 mm

For the simple alignment of the MULTITUBO systems multilayer pipe. Can be mounted to the pipe uncoiler with the adapter (Art.-Nr. 33030).

ArticleNo	Type	Unit	Carton
33020	16 mm - 25 mm	1 pc.	pc.



Adapter for pipe straightener

Adapter for attaching the pipe straightener (Art.-Nr. 33020) to the pipe uncoilers (Art.-Nr. 33000 und 33010).

ArticleNo	Type	Unit	Carton
33030	Adapter for 33020	1 pc.	pc.



Inside Bending Spring

For bending the MULTITUBO systems multilayer pipes.

ArticleNo	Type	Unit	Carton
32010	16 mm	1 pc.	pc.
32030	20 mm	1 pc.	pc.
32040	25 mm	1 pc.	pc.



Outside Bending Spring

For bending the MULTITUBO systems multilayer pipes.

ArticleNo	Type	Unit	Carton
32100	16 mm	1 pc.	pc.
32110	16 mm	1 pc.	pc.
32130	20 mm	1 pc.	pc.
32140	25 mm	1 pc.	pc.

Hand Bending tool 16 - 32 mm

Hand bending tool for MULTITUBO alu-multi-layer pipes 16 / 20 / 25 / 32 mm, supplied in case.

ArticleNo	Type	Unit	Carton
32210	16 / 20 / 25 / 32 mm	1 pc.	pc.



Stapler

Stapler for fixing MULTITUBO aluminium multilayer pipes to the insulation. The stapling needles are securely anchored in the insulation from the rear magazine by pressing the hand knob.

ArticleNo	Type	Unit	Carton
33040	16 mm / 20 mm	1 pc.	pc.

TOOLS UNIVERSAL

Stapling Needles

Stapling needles for fixing MULTITUBO aluminium multilayer pipes to the insulation. Stapling needles 50 mm, connected in 25 pieces.



ArticleNo	Type	Unit	
33045	Tacker needle, 50 mm	250 pcs	pc.

Pressure Test Plug

Re-usable plug with exhaust valve, designed for the pressure test of MULTITUBO systems-installations. Exhaust valve can be removed.



ArticleNo	Type	Bag	Carton
30310	16	1 pc.	pc.
30330	20	1 pc.	pc.
30340	25	1 pc.	pc.
30350	32	1 pc.	pc.

Pressure Test Plug FT

Re-usable plug with female thread, designed for the pressure-test of MULTITUBO-installations.



ArticleNo	Type	Bag	Carton
30315	16 x 1/2"	10 pcs	200 pcs
30335	20 x 1/2" FT	10 pcs	200 pcs
30345	25 x 1/2" FT	10 pcs	170 pcs
30355	32 x 1/2" FT	10 pcs	100 pcs
30365	40 x 1/2" FT	10 pcs	60 pcs

TOOLS PRESSING

Battery Pressing Tool (Li-Ion technology)

Supplied in carrying case, including a Li-Ion battery 14V and charger unit. For dimensions 16 - 75 mm, turnable pressing jaw entry. Weight of the machine and battery approx. 4.3 kgs, piston force: 32 kN.



ArticleNo	Type	Unit	Carton
30002	Li-Ion 16 - 110	1 pc.	pc.
30005	Li-Ion 16 - 110	1 pc.	pc.

Pressing Jaw

For pressing of the MULTITUBO systems press-fittings.



ArticleNo	Type	Carton	Carton
31010	16 mm U	1 pc.	pc.
31030	20 mm U	1 pc.	pc.
31040	25 mm U	1 pc.	pc.
31050	32 mm U	1 pc.	pc.
31060	40 mm U	1 pc.	pc.
31070	50 mm U	1 pc.	pc.
31080	63 mm U	1 pc.	pc.
31090	75 mm U	1 pc.	pc.

TOOLS UNIVERSAL



Pressing Jaw set in case, U-contour

Pressing jaw set 16/20/25 U in a case (with 4 slots) for pressing MULTITUBO press fittings with the cordless pressing machine (Art. 30002 and 30005).

ArticleNo	Type	Carton	Carton
31099	Set 16 / 20 / 25 U	1 pc.	pc.



Mini Battery Pressing Tool (Li-Ion technology)

Supplied in carrying case, including a Li-Ion battery 14V and charger unit. For dimensions 16 - 40 mm, turnable pressing jaw entry. Weight of the machine and battery approx. 2,4 kgs, piston force: 22 kN.

ArticleNo	Type	Unit	Carton
30006	Li-Ion 16 - 40 mm	1 pc.	pc.



Mini Pressing Jaw

For pressing of the MULTITUBO systems press fittings in combination with Mini battery pressing tool.

ArticleNo	Type	Carton	Carton
31310	Mini 16 mm U	1 pc.	pc.
31330	Mini 20 mm U	1 pc.	pc.
31340	Mini 25 mm U	1 pc.	pc.
31350	Mini 32 mm U	1 pc.	pc.
31360	Mini 40 mm U	1 pc.	pc.



Empty Case for pressing jaws

Sturdy plastic case for storing and transporting 4 pressing jaws 16 mm to 32 mm (items: 31010 - 31050 and 31310 - 31350).

ArticleNo	Type	Carton	Carton
31098	Empty case for 4 pressing jaws, 16 - 32 mm	1 pc.	pc.



Manual Pressing Tool 16/ 20 / 32

For use with MULTITUBO systems Press-Fittings in conjunction with replaceable inserts. Supplied in carrying case, with inserts 16 mm / 20 mm / 25 mm / 32 mm.

ArticleNo	Type	Unit	Carton
30501	16 / 20 / 25 / 32 mm U	1 Set	Set

TOOLS MODULAR



Pressing Chain

Pressing chain for use with 75/90/110 mm MODULAR 90/110 Press Fittings and the base pressing unit. To be used only with pressing machines of min. 32 kN piston force.

ArticleNo	Type	Carton	Carton
31175	U75	1 pc.	pc.
31190	U90	1 pc.	pc.
31110	U110	1 pc.	pc.



Base Pressing Unit

Pressing unit to connect pressing chains to the pressing machine.

ArticleNo	Type	Carton	Carton
31100	Modular Base pressing jaw	1 pc.	pc.



MODULAR Torque wrench

Preset torque wrench to fix the gipper-clamps of MODULAR Press-Fittings. Tightening torque 7 Nm.

ArticleNo	Type	Carton	Carton
30400	90/110	1 pc.	pc.

SPARE PARTS TOOLS



Substitution blade for pipe cutter, 16 - 20 mm

Substitution blade for precision pipe cutting pliers (Art.-Nr. 30020) for MULTITUBO multi-layer pipes, 16 - 20 mm.

ArticleNo	Type	Unit	Carton
30025	Sparepart for Article 30020	1 pc.	pc.



Spare cutting disc for pipe cutting tools

Spare cutting disc for pipe cutting tool, 20 - 75 mm (Art.-No. 30030 since 10/2013), 50 - 110 mm (Art.-No. 30031), 63 - 110 mm (Art. 30039)

ArticleNo	Type	Unit	Carton
30035	20 - 63 mm	1 pc.	pc.
30037	20 - 75 mm	1 pc.	pc.
30036	50 - 110 mm	1 pc.	pc.

SPARE PARTS TOOLS



Substitute battery for pressing tool, 16 - 110 mm

Spare part battery, Li-Ion technology, 14V, for battery pressing tool 16 - 110 mm (ref. 30005).

ArticleNo	Type	Unit	Carton
30008	Substitution Battery PM/PMZ, Li-Ion, 5,0 A/h	1 pc.	pc.



Substitute battery for MINI battery pressing tool, 16 - 40 mm

Spare part battery, Li-Ion technology, 14V, for MINI battery pressing tool 16 - 40 mm (ref. 30006).

ArticleNo	Type	Unit	Carton
30009	Substitution Battery MINI, Li-Ion, 2,5 A/h	1 pc.	pc.

STARTERPACKS



MULTITUBO Starter pack - PM

MULTITUBO systems starter set PM, consisting of:
Multitubo pipes 16/20/25mm and Battery Pressing Tool 16-110 mm with press-end signal, with battery and charger. Supplied in a metal case.

ArticleNo	Type	VE	
31995	with Battery Pressing Device PM	1 Pack	Pack



MULTITUBO Starter pack - PMZ

MULTITUBO systems starter set PMZ, consisting of:
Multitubo pipes 16/20/25mm and Battery Pressing Tool 16-110 mm with automatic circuit control, with battery and charger. Supplied in a metal case.

ArticleNo	Type	VE	
31996	with Battery Pressing Device PMZ	1 Pack	Pack



MULTITUBO Starter pack - Mini

MULTITUBO systems starter set Mini, consisting of:
Multitubo pipes 16/20mm and Battery Pressing Tool Mini 16-40 mm with automatic circuit control, with pressing jaws 16/20/25/32 mm, battery and charger. Supplied in a metal case.

ArticleNo	Type	VE	
31997	with Pressing Device Mini and jaws 16 - 32mm	1 Pack	Pack

General Terms and Conditions

1. General Provisions

1.1 Our General Terms and Conditions of Delivery shall apply to all contracts, deliveries and other services, including consulting services and information provided.
1.2 They shall also apply to all future contracts with the Customer as well as to future deliveries and other services to be rendered to the Customer.]

2. Offer, Conclusion of Contract

2.1 Our offers are non-binding.
2.2 Orders placed with us, amendments and supplements to contracts, as well as ancillary agreements, must be made in writing. However, the contract shall also be concluded if we execute an order placed with us in writing or orally.
2.3 All declarations made by our employees and agreements concluded with them require our written confirmation. This shall apply in particular to statements concerning quality or durability guarantees.
2.4 Drawings, technical specifications and other performance data shall only be binding if this has been expressly agreed in writing.
2.5 We reserve the right to make reasonable design modifications at any time.

3. Prices

3.1 All prices are stated in EURO ex works, excluding packaging, loading, freight and assembly, plus the applicable statutory value added tax.
3.2 We shall charge the prices applicable on the date of delivery or performance.

4. Payment

4.1 Only persons authorized by our company in writing to collect payments shall be entitled to collect monies.
4.2 Agreed payment periods shall only be deemed to have been observed if the amount due is available to us on the due date.
4.3 In the event of default in payment by the Customer, we shall be entitled to charge default interest at the statutory rate. We reserve the right to claim further damages.
4.4 Complaints shall not entitle the Customer to exceed the payment deadlines. Set-off against counterclaims of the Customer that have not been acknowledged or finally adjudicated shall be excluded.
4.5 Notwithstanding any provisions of the Customer to the contrary, we shall be entitled to apply payments first to outstanding liabilities arising from previously concluded contracts, initially against any costs and interest incurred and then against the principal claim.

5. Partial Deliveries, Excess and Short Deliveries

5.1 We shall be entitled to make reasonable partial deliveries, which we may invoice immediately. Any agreed quantity discounts shall remain unaffected.
5.2 In the case of custom-made products, excess or short deliveries of up to 10% shall be permissible and shall be taken into account in the invoice.

6. Transfer of Risk

6.1 Risk shall pass to the Customer as soon as the goods have left our works or warehouse.
6.2 If shipment is delayed for reasons for which the Customer is responsible, risk shall pass to the Customer upon receipt of notification that the goods are ready for shipment.

7. Delivery Period

7.1 Delivery periods shall be extended appropriately if unforeseen obstacles arise that are beyond our control, such as strikes, lockouts, operational disruptions or delays in the delivery of preliminary materials, irrespective of whether such obstacles occur at our company or at our suppliers. We shall not be responsible for such circumstances even if we are already in default.

8. Retention of Title

8.1 Goods delivered by us shall remain our property until all our present claims against the Customer, as well as future claims insofar as they are connected with the delivered goods, have been satisfied.
8.2 The Customer shall be entitled to resell goods owned by us (goods subject to retention of title) in the ordinary course of business. However, the Customer hereby assigns to us all claims arising from such resale, irrespective of whether the goods subject to retention of title are resold before or after processing or whether they are combined with real property or movable property. If the goods subject to retention of title are resold after processing or together with other goods not owned by us, or if they are combined with real property or movable property, the Customer's claim against its purchasers in the amount of the delivery prices agreed between the Customer and us for the goods subject to retention of title shall be deemed assigned to us.
8.3 The Customer shall remain authorized to collect these claims even after their assignment to us. Our authority to collect the claim ourselves shall remain unaffected; however, we undertake not to do so as long as the Customer duly meets its payment obligations. If the Customer exercises its authority to collect the claim, we shall be entitled to the proceeds collected in the amount of the delivery price agreed between the Customer and us for the goods subject to retention of title.
8.4 We undertake, upon request, to release the securities to which we are entitled insofar as their value exceeds the claims to be secured, provided that such claims have not yet been settled, by more than 20%.
8.5 If we accept bills of exchange as a means of payment, our retention of title shall remain in force until it has been established that we can no longer be held liable under such bill of exchange.

9. Complaints

9.1 Obvious defects must be notified to us in writing and in detail within 8 days of receipt of the goods. This shall also apply to incorrect deliveries and excess or short deliveries. Other defects must be notified without undue delay. Failure to comply with the duty to give notice of defects shall result in the loss of the Customer's claims for defects.
9.2 In the event of a complaint, the Customer shall send the goods to our address without making any prior alterations or interventions.

10. Liability for Defects

10.1 In the case of justified notices of defects, we shall, at our discretion, remedy the defect or provide a replacement delivery. If subsequent performance or replacement delivery fails, or if a reasonable grace period set by us for subsequent performance expires without result, the Customer shall be entitled to reduce the remuneration or withdraw from the contract.
10.2 After expiry of 12 months from the transfer of risk, all claims for defects shall be excluded.
10.3 The statutory provisions governing the sale of consumer goods shall remain unaffected.

11. Damages

11.1 We shall be liable in accordance with statutory provisions for damage based on a guarantee declared by us.

11.2 We shall also be liable for damage resulting from injury to life, body or health, unless we are not responsible for the breach of duty, and for damage resulting from a breach of duty by us, unless the breach of duty was neither intentional nor caused by gross negligence on our part. Our liability under the Product Liability Act shall remain unaffected insofar as it is mandatory.

11.3 In all other respects, we shall not be liable for damages arising from defects or other breaches of duty. This shall not apply to damage resulting from a culpable breach of essential contractual obligations; in such cases, our liability shall be limited to the damage that we foresaw as a possible consequence of the breach of duty at the time the contract was concluded or that we should have foreseen, taking into account the circumstances known or which should have been known to us.

11.4 Our liability for defects or other breaches of duty pursuant to the preceding paragraph 11.3 shall, in the case of property damage, additionally be limited to the insured amount under our liability insurance, for which the insurer can provide confirmation at the Customer's request. In the case of financial loss, our liability pursuant to paragraph 11.3 above shall be limited to the lost profit resulting from the use of the specific delivery.

11.5 A breach of duty by our legal representatives or our vicarious agents shall be deemed equivalent to a breach of duty by us.

11.6 Any statutory rights of withdrawal that may exist shall not be restricted by the above provisions.

12. Place of Performance, Place of Jurisdiction, Applicable Law

12.1 The place of performance for our deliveries shall be the registered office of our company in 97437 Haßfurt.

12.2 The place of jurisdiction shall be Haßfurt. However, we shall also be entitled to bring legal action against the Customer at the location of its registered office.

12.3 Any disputes arising from this contract and agreements and legal transactions connected with it shall be governed exclusively by German law. With reference to the Federal Data Protection Act, we point out that data arising in connection with the business relationship will be stored.

DW Verbundrohr GmbH

Langer Rain 38 97437 Haßfurt Germany

Fon +49 (0) 9521-95356-0

Fax +49 (0) 9521-95356-9

E-Mail info-de@elydan.eu

www.multitubo.eu